


CW Aluminium Gland

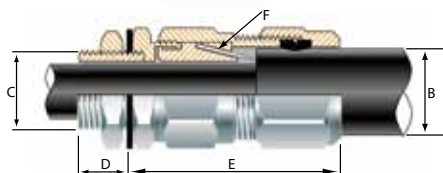


The CW Aluminium Gland is designed for Aluminium Wire Armoured cables (AWA) for general indoor/outdoor use where a seal on the outer sheath is required to obtain an IP rating. Seals on the cable sheath, to IP66 if fitted with a sealing gasket.

Material Aluminium
IP Ratings IP66
Standard BS6121 Part 1 1989

Gland Size	Entry Thread		Cable Details		Armour Dia		Max E	Kit Code	LSF Kit Code
	Metric C	Min D	Min B	Max B	Min F	Max F			
1 - M20	M20 x 1.5	10	14.5	21.0	0.9	1.25	47.0	GPCWA1	GPCWA1LS
2 - M25	M25 x 1.5	10	20.5	27.0	1.25	1.6	56.0	GPCWA2	GPCWA2LS
3 - M32	M32 x 1.5	10	26.5	33.5	1.6	2.0	57.0	GPCWA3	GPCWA3LS
4 - M40	M40 x 1.5	15	33.0	43.0	1.6	2.0	68.0	GPCWA4	GPCWA4LS
5 - M50s	M50 x 1.5	15	36.0	43.0	2.0	2.5	72.0	GPCWA5S	GPCWA5SLS
5 - M50	M50 x 1.5	15	43.0	52.5	2.0	2.5	72.0	GPCWA5	GPCW5ALS
6 - M63	M63 x 1.5	15	52.0	65.5	2.5		89.0	GPCWA6	GPCW6ALS

Note: Gland kits are complete with two terminations up to and including M32, M40 and above are single. Kits contain gland, aluminium lock nut, aluminium earth tag & PVC or LSF shroud.

CCG IP PLUS Corrosion Guard Gland

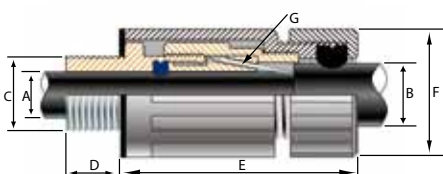

The IP PLUS Corrosion Guard Gland is designed for use with Steel Wire Armoured (SWA) cable. It provides an IP68 moisture proof seal on the outer sheath of the cable with a specially formulated IP PLUS seal to seal on the innersheath of the cable, thus making the gland suitable for use in highly corrosive and wet locations. The screw-on Corrosion Guard is manufactured from non-corrosive material to protect the steel wire armour and metal parts of the gland.

Material Brass Nickel Plated
IP Ratings IP66/68
Standard BS6121 Part 1 1989



Gland Size	Entry Thread		Cable Details				Armour Dia		Max E	Max Dia F	Gland Code	LSF Kit Code
	Metric C	Min D	Min A	Max A	Min B	Max B	Min G	Max G				
00 - M20ss	M20 x 1.5	15	3.0	8.0	8.0	13.5	0.2	1.25	53.0	35.0	054600	GPBWCG00
0 - M20s	M20 x 1.5	15	7.0	12.0	11.5	16.0	0.2	1.25	53.0	35.0	0546-0	GPBWCG0
1 - M20	M20 x 1.5	15	9.0	15.5	14.5	21.0	0.2	1.25	56.0	36.5	054601	GPBWCG1
2 - M25	M25 x 1.5	15	14.0	20.5	20.5	27.0	0.2	1.6	60.0	46.0	054602	GPBWCG2
3 - M32	M32 x 1.5	15	19.0	26.5	26.5	33.5	0.2	2.0	66.0	53.0	054603	GPBWCG3
4 - M40	M40 x 1.5	20	26.0	34.5	33.0	43.0	0.3	2.0	78.0	68.0	054604	GPBWCG4
5 - M50	M50 x 1.5	20	34.0	44.5	42.5	52.5	0.4	2.5	87.0	84.0	054605	GPBWCG5
6 - M63	M63 x 1.5	20	44.0	57.0	52.5	65.5	0.4	2.5	110.0	110.0	054606	GPBWCG6
7 - M75	M75 x 1.5	20	56.0	68.0	65.5	78.0	0.4	3.0	118.0	124.0	054607	GPBWCG7

Note: Gland kits are complete with two terminations up to and including M32, M40 and above are single. Kits contain gland, brass lock nut, brass earth tag & LSF Corrosion Guard shroud.