


INDOOR/OUTDOOR - FLEX/UNARMoured CABLE



## A2 ArmaKit

### Low Smoke Zero Halogen

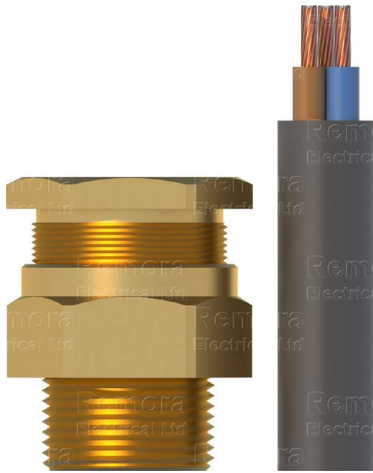

**Flexible and Unarmoured Cable Glands**

**Low Smoke Zero Halogen**

The ArmaKit® A2 Compression Gland is designed for use with unarmoured, elastomeric and plastic cable for both indoor and outdoor applications. Seals on the cable sheath to IP66 if fitted with a sealing washer.

An integral polychloroprene environmental seal provides full protection against high power jets of liquid (IP66) and is 100% dust tight, an internal brass washer ensures the seal will not deform as the glands are torqued down.

ArmaKit® A2 Glands are suitable for use in indoor or outdoor environments where moisture or dust exposure is anticipated.

### LSZH ArmaKit® A2 Gland Kits

- For indoor and outdoor use.
- Single-part handling.
- Precision manufactured from high quality extrusion brass.
- Supplied in kits containing;
- M16-M32 2 glands, 2 locknuts, 2 LSZH shrouds
- M40-M75 1 gland, 1 locknut, 1 LSZH shroud

**Standards:** EN 60529

BS 6121-1:2005

**Protection:** IP54



IP66 (If fitted with sealing washer)

**Temperature Range:** -60°C to 130°C

**Material (Gland):** Brass BS 2874 CZ121 Pb3

**Material (Seal):** LSZH Silicone

**Material (Shroud):** LSZH Silicone



Code	Cable OD (B)		Entry Thread		Gland		
	Min	Max	Size (C)	Length (L1)	Length (L2)	A/F	A/C
PGPA216LSZH	3.5	9.0	M16 x 1.5	12.0	31.0	20.0	22.2
PGPA220ssLSZH	3.5	9.0	M20 x 1.5	12.0	32.0	22.0	24.4
PGPA220sLSZH	8.0	11.8	M20 x 1.5	12.0	32.0	22.0	24.4
PGPA220LSSZH	11.0	14.2	M20 x 1.5	12.0	34.0	24.0	26.6
PGPA225LSZH	15.0	20.2	M25 x 1.5	12.0	36.0	32.0	35.5
PGPA232LSZH	20.0	26.4	M32 x 1.5	12.0	39.0	40.0	44.4
PGPA240LSZH	27.0	32.8	M40 x 1.5	15.0	45.0	46.0	51.1
PGPA250sLSZH	32.0	38.3	M50 x 1.5	15.0	47.0	55.0	61.0
PGPA250LSZH	38.0	44.0	M50 x 1.5	15.0	47.0	60.0	66.0
PGPA263sLSZH	42.5	50.0	M63 x 1.5	15.0	50.0	70.0	77.7
PGPA263LSZH	48.5	56.0	M63 x 1.5	15.0	50.0	75.0	83.2
PGPA275sLSZH	54.5	62.0	M75 x 1.5	20.0	58.0	80.0	88.8
PGPA275LSZH	60.5	67.5	M75 x 1.5	20.0	58.0	85.0	94.4

Call the Remora sales team at **01226 352 000**

Challenge us - We find a solution