

HAZARDOUS AREA CCG™ CABLE GLANDS | Cable Glands

INDOOR/OUTDOOR - UNARMoured

CCG FLP-TR HIGH TEMP Cable Gland

The FLP-TR HIGH TEMP Compression Gland is designed for use with unarmoured elastomeric and plastic where extreme temperature seals are required. Fitted with dual elastomeric seals; the inner seals on the cable sheath, the tough outer seal grips the cable providing superior cable retention and Ingress Protection. Seals to IP68 if fitted with a sealing washer.

- For indoor and outdoor use in Group I underground coal mines.
- Two-part handling, no loose parts.
- Factory fitted captive elastomeric seals for *Built In Safety™*.
- Extra tough outer gripper seal.
- Precision manufactured from high quality brass.
- Supplied complete with IP sealing washer.

Classification IECEx: Ex d I/IIc Mb/Gb, Ex e I/IIc Mb/Gb, Ex nR IIC Gc, Ex tb IIIC Db
ATEX: I M2, II 2G, II 2D, II 3G, Ex db I/IIc Mb/Gb, Ex eb I/IIc Mb/Gb, Ex tb IIIC Db
Certification: IECEx ITA 12.0014X IEC 60079-0, IEC 60079-1, IEC 60079-7
IEC60079-15, IEC60079-31

CML 16 ATEX 1001X EN 60079-0, EN60079-1, EN60079-7, EN 60079-31
CML 16 ATEX 4002X EN 60079-0, EN 60079-15
MASC MS/13-028X SANS/IEC 60079-0, SANS/IEC 60079-1
SANS/IEC 60079-7, SANS/IEC 60079-15
SANS/IEC 60079-31,
SANS/IEC 60529, SANS 808



Protection: IP66 / IP68 (2m) IEC 60529



Temperature Range: -60°C to 160°C Extreme Temp. Seals

Material (Gland): Brass / Nickel Plated Brass BS 2874 / EN 12164

Material (Seal): Extreme Temperature Silicone Seals



Code	Reference	Cable OD (B)		Gland Length (L2)	Thread Entry (C)	Length (L1)	A/F	A/C
	Size	Min	Max					
052416A-HT	00 - 16ss	3.0	8.0	61.0	M16 x 1.5	15.0	25.0	28.0
052400A-HT	00 - 20ss	3.0	8.0	61.0	M20 x 1.5	15.0	25.0	28.0
0524-0A-HT	0 - 20s	8.0	11.5	61.0	M20 x 1.5	15.0	25.0	28.0
052401A-HT	1 - 20	11.5	14.0	63.0	M20 x 1.5	15.0	27.0	30.0
052402A-HT	2 - 25	14.0	20.2	75.0	M25 x 1.5	15.0	40.0	45.0
052403A-HT	3 - 32	20.0	26.5	91.0	M32 x 1.5	15.0	45.0	51.0
052404A-HT	4 - 40	26.5	32.5	104.0	M40 x 1.5	20.0	55.0	62.0
052455A-HT	5s - 50s	32.5	38.0	110.0	M50 x 1.5	20.0	70.0	79.0
052405A-HT	5 - 50	38.0	44.5	110.0	M50 x 1.5	20.0	70.0	79.0
054565A-HT	6s - 63s	44.5	50.0	116.0	M63 x 1.5	20.0	85.0	96.0
052406A-HT	6 - 63	50.0	56.0	116.0	M63 x 1.5	20.0	85.0	96.0
052407A-HT	7 - 75	56.0	65.0	125.0	M75 x 1.5	20.0	96.0	108.0

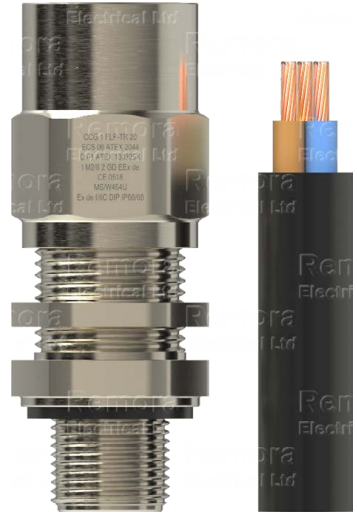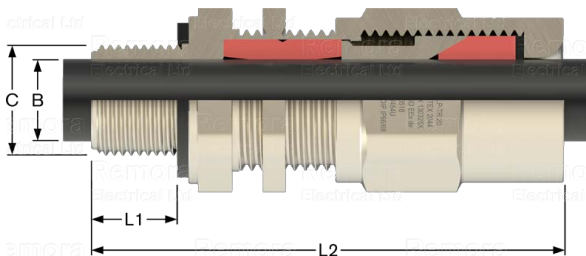

Cable Glands
Accs.
Wiring Terminals
Tube Lugs
Tooling
Earthing/Lightning
Joining
Heat-shrink
Junction Boxes
Cable Cleats
Cable Ties
MCC Cable
Conduit
Fixing & Security

Call the Remora sales team at **01226 352 000**

Challenge us - We find a solution