

## CABLE HANGERS

# Hangers

## Cable Hangers

### Galvanised Steel Cable Hangers



Cable Hangers are designed for holding power cables in single or multiple runs on walls or support structures. Fabricated from mild steel flat 6mm bar, hot dipped galvanised to BS EN ISO 1461:1999. Special designs are available on request.

The recommended safe working load for each hook is shown below. Hangers with multiple hook configurations are designed to operate with all hooks carrying their maximum load.

- Hanging/routing single and multiple cables to walls or supports structures
- Superior strength tensile strength
- Excellent stiffness

**Temperature Range:** -40°C to 150°C

**Material:** Mild Steel Hot Dipped Galvanised

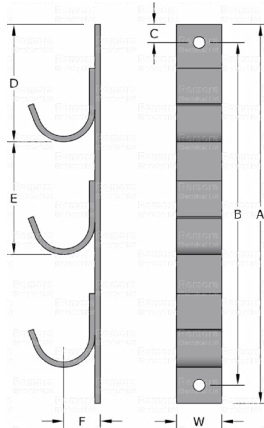

Code	Cable Range		Ways	Dimensions					Material Size			Safe Working Load (Kg)
	Min	Max		(A)	(B)	(C)	(D)	(E)	(F)	(W)	Thickness	
CH1W1	-	50.0	1	145.0	105.0	20.0	105.0	-	37.0	40.0	6.0	200.0
CH2W1	-	50.0	2	235.0	195.0	20.0	105.0	90.0	37.0	40.0	6.0	200.0
CH3W1	-	50.0	3	325.0	285.0	20.0	105.0	90.0	37.0	40.0	6.0	200.0
CH4W1	-	50.0	4	415.0	375.0	20.0	105.0	90.0	37.0	40.0	6.0	200.0
CH5W1	-	50.0	5	505.0	465.0	20.0	105.0	90.0	37.0	40.0	6.0	200.0
CH6W1	-	50.0	6	595.0	555.0	20.0	105.0	90.0	37.0	40.0	6.0	200.0
CH1W2	51.0	75.0	1	170.0	130.0	20.0	130.0	-	50.0	50.0	6.0	200.0
CH1W2	51.0	75.0	2	295.0	255.0	20.0	130.0	125.0	50.0	50.0	6.0	200.0
CH1W2	51.0	75.0	3	420.0	380.0	20.0	130.0	125.0	50.0	50.0	6.0	200.0
CH1W2	51.0	75.0	4	545.0	505.0	20.0	130.0	125.0	50.0	50.0	6.0	200.0
CH1W2	51.0	75.0	5	670.0	630.0	20.0	130.0	125.0	50.0	50.0	6.0	200.0
CH1W2	51.0	75.0	6	795.0	755.0	20.0	130.0	125.0	50.0	50.0	6.0	200.0
CH1W3	76.0	100.0	1	185.0	145.0	20.0	145.0	-	62.0	50.0	6.0	200.0
CH2W3	76.0	100.0	2	345.0	305.0	20.0	145.0	160.0	62.0	50.0	6.0	200.0
CH3W3	76.0	100.0	3	505.0	465.0	20.0	145.0	160.0	62.0	50.0	6.0	200.0
CH4W3	76.0	100.0	4	665.0	625.0	20.0	145.0	160.0	62.0	50.0	6.0	200.0
CH5W3	76.0	100.0	5	825.0	785.0	20.0	145.0	160.0	62.0	50.0	6.0	200.0
CH6W3	76.0	100.0	6	985.0	945.0	20.0	145.0	160.0	62.0	50.0	6.0	200.0