

Cable Cleats | METALLIC SINGLE / TREFOIL / QUAD

STAINLESS STEEL CABLE CLEATS

Vulcan+


Single/Dual-Fixing



Vulcan+ cleats have a unique compact design so they can be easily installed, even when space is limited. Vulcan+ cleats are available in multiple sizes with range-taking capability, to suit trefoil, single, quad or bundled cables.

Manufactured in Type 316L Stainless Steel, Vulcan offer excellent protection against the harshest environmental conditions. To protect and cushion the cables during short-circuit conditions, the cleat comes with an integral Low Smoke and Fume Zero Halogen Polymeric liner and base pad.

We recommend fixing VRT+ using one 10mm bolt for sizes 00 to 09, and one or two 10mm bolts for sizes 10 to 20. Alternative bolt recommendations on request.

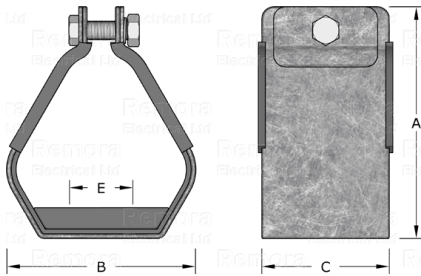

316 Stainless Steel Trefoil Cleat

- Compact design
- Excellent weathering and corrosion resistance
- Excellent tensile strength
- Excellent stiffness

Standards: European Standard IEC 61914:2009

Max Short-Circuit: 104kA 600mm Spacing
132kA 300mm Spacing

Temperature Range: -40°C to 60°C

Material: 316 Stainless Steel / Polymeric Liner/Base Pad



Code	Trefoil Cable Range		Single Cable Range		Dimensions				Fixing Holes
	Min	Max	Min	Max	(A)	(B)	(C)	(E)	
VRT+00	19.0	24.0	30.0	42.0	93.0	60.0	54.0	N/A	1 x M10
VRT+01	23.0	28.0	38.0	50.0	98.0	63.0	54.0	N/A	1 x M10
VRT+02	27.0	32.0	43.0	58.0	106.0	72.0	54.0	N/A	1 x M10
VRT+03	30.0	35.0	49.0	64.0	112.0	79.0	54.0	N/A	1 x M10
VRT+04	33.0	38.0	55.0	70.0	118.0	85.0	54.0	N/A	1 x M10
VRT+05	36.0	42.0	58.0	75.0	125.0	96.0	54.0	N/A	1 x M10
VRT+06	40.0	46.0	63.0	84.0	133.0	105.0	54.0	N/A	1 x M10
VRT+07	44.0	50.0	73.0	90.0	140.0	112.0	54.0	N/A	1 x M10
VRT+08	48.0	55.0	83.0	100.0	149.0	121.0	54.0	N/A	1 x M10
VRT+09	51.0	58.0	86.0	104.0	154.0	126.0	54.0	N/A	1 x M10
VRT+10	55.0	62.0	88.0	110.0	162.0	134.0	54.0	50.0	3 x M10
VRT+11	59.0	66.0	90.0	115.0	170.0	143.0	54.0	50.0	3 x M10
VRT+12	63.0	70.0	100.0	125.0	177.0	152.0	54.0	50.0	3 x M10
VRT+13	67.0	74.0	107.0	132.0	185.0	161.0	54.0	75.0	3 x M10
VRT+14	71.0	78.0	120.0	145.0	192.0	169.0	54.0	75.0	3 x M10
VRT+15	74.0	82.0	125.0	150.0	199.0	176.0	54.0	75.0	3 x M10
VRT+16	77.0	85.0	132.0	153.0	205.0	183.0	54.0	75.0	3 x M10
VRT+17	81.0	89.0	136.0	156.0	216.0	190.0	54.0	75.0	3 x M10
VRT+18	85.0	93.0	139.0	159.0	225.0	200.0	54.0	75.0	3 x M10
VRT+19	89.0	97.0	142.0	162.0	235.0	200.0	54.0	75.0	3 x M10
VRT+20	93.0	101.0	150.0	170.0	240.0	215.0	54.0	75.0	3 x M10