


Terminals | PRE-INSULATED RING TERMINALS

WHAT'S NEW IN... PRE-INSULATED CRIMP TERMINALS

Pre-Insulated Ring, Fork and Blade Terminals


Made from oxygen-free high conductivity copper, these terminals are electro-tin plated for excellent conductivity and resistance to corrosion. Push-on terminals are made from brass, the insulated types have an additional internal copper sleeve, ensuring insulation support and a good crimp joint.

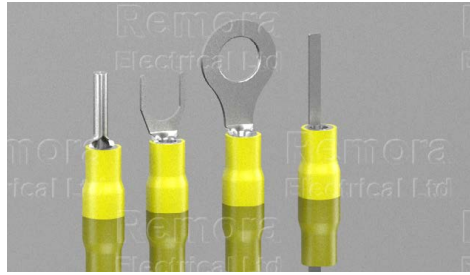

Pre-Insulated Ring Terminals

Ring terminals connect a single wire to a screw or stud type electrical connection. The terminal connectors ring shape completely surrounds the screw or stud to create a tight connection.

Temperature Range: -40°C to 105°C
Material: Tin Plated Electrolytic Copper / Vinyl
Colour: Red, Blue, Yellow
Standards: DIN 46288 Part 4



Code	Colour	Range mm ²	ID (A)	ID (B)	Length (L1)	Length (L2)	Width (W)
RR32	Red	0.5-1.5	1.7	3.2	7.5	17.5	5.5
RR37		0.5-1.5	1.7	3.7	7.5	17.5	5.5
RR43		0.5-1.5	1.7	4.3	9.4	19.4	6.6
RR53		0.5-1.5	1.7	5.3	10.8	20.8	8.0
RR64		0.5-1.5	1.7	6.4	16.8	26.8	11.6
RR84	Blue	0.5-1.5	1.7	8.4	16.8	26.8	11.6
RR105		0.5-1.5	1.7	10.5	20.5	30.5	13.6
BR32		1.5-2.5	2.3	3.2	7.8	17.8	6.6
BR37		1.5-2.5	2.3	3.7	7.8	17.8	6.6
BR43		1.5-2.5	2.3	4.3	11.8	21.8	6.6
BR53	Yellow	1.5-2.5	2.3	5.3	11.8	21.8	8.5
BR64		1.5-2.5	2.3	6.4	16.8	26.8	12.0
BR84		1.5-2.5	2.3	8.4	16.8	26.8	12.0
BR105		1.5-2.5	2.3	10.5	20.5	30.5	13.6
BR130		1.5-2.5	2.3	13.0	25.4	35.4	19.2
YR43	Yellow	4.0-6.0	3.4	4.3	9.7	22.7	7.2
YR53		4.0-6.0	3.4	5.3	13.0	26.0	9.5
YR64		4.0-6.0	3.4	6.4	16.5	29.5	12.0
YR84		4.0-6.0	3.4	8.4	21.0	34.0	15.0
YR105		4.0-6.0	3.4	10.5	21.0	34.0	15.0
YR130		4.0-6.0	3.4	13.0	25.6	38.6	19.2