

Branch Mechanical Connectors

Branch Mechanical Connectors for use with RCB Resin Joints.

For use with cables up to 300mm².

Material: Aluminium Alloy



Code	Length	Width	Height	Cable Range mm ²
P1	23.0	20.0	25.0	< 35.0
WM1	40.0	41.0	34.0	16.0 - 95.0
WM2	50.0	50.0	41.0	50.0 - 185.0
WM3	60.0	59.0	49.0	120.0 - 300.0



Connector Strips

Feature: Easy Cut, all screws are captive & raised for quick easy wiring


Temperature Range: 80°C

Material: Polyethylene (PE) Housing / Galvanised Steel Screws

Colour: Natural



Code	Sector mm ²	Rated Current	Rated Voltage	(L)	Width (W)	Dia 1	Dia 2 (D)	(H)
12WSC3A	4.0	3 Amp	380V	93.0	16.8	2.8	2.3	7.8
12WSC5A	6.0	5 Amp	380V	115.0	18.8	3.3	2.6	10.0
12WSC10A	10.0	10 Amp	400V	129.0	20.7	4.3	2.8	11.0
12WSC15A	12.0	15 Amp	400V	137.0	22.5	4.5	2.8	12.0
12WSC30A	16.0	30 Amp	400V	165.0	25.5	5.5	3.0	14.0
12WSC60A	25.0	60 Amp	400V	187.0	31.2	6.5	3.8	16.5

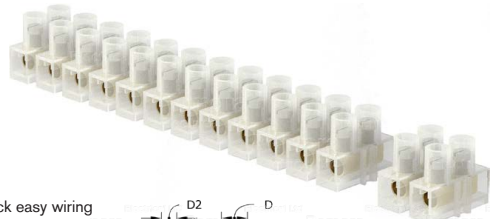

Two-Part Jointing Resin

Easy-pour PC5581 is specially designed for cable joints up to 1kV. PC5581 has good anti corrosion properties and shows excellent adhesion to metals, ceramics, and many different plastics.

Material: Hydrolysis resistant polyurethane resin

Voltage: 1kV (1000v)

Standards: IEC 60455-3-8:2013



Code	Content ml	Colour
PR350	350	Black
PR750	750	Black
PR2000	3000	Black