





# Blade

**Copper Blade Terminal Lugs 600/1000V**

Blade lugs are designed for terminating conductors into terminal blocks. Manufactured from copper strip, rolled, brazed and tin plated to BS 1872 Part 2 for corrosion resistance and suitable for use up to 200°C. Designed and manufactured to meet the performance requirements of BS EN61238-1-2003 and BS 4579. Nickel plated lugs are available for high temperature applications up to 343°C.

**Temperature Range:** up to 200°C  
**Material:** Copper BS EN 61238-1-2003 and BS 4579 Part 1  
**Plating:** Tin BS 1872 Part 2

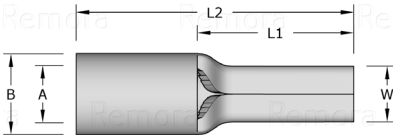

Code	Cable Size mm²	(A)	(B)	(W)	(D)	(L2)	(L1)	Palm Thickness
10-BLADE	10	4.8	6.8	4.4	8.0	24.1	4.8	2.0
16-BLADE	16	6.0	8.0	5.6	10.0	34.3	6.0	2.5
25-BLADE	25	7.0	9.0	7.0	14.0	38.0	7.0	2.5
35-BLADE	35	8.2	10.2	7.7	16.0	43.4	8.2	3.0
50-BLADE	50	9.5	12.0	9.5	20.0	50.5	9.5	3.5
70-BLADE	70	11.2	14.2	12.5	24.0	55.0	11.2	4.0