MICC RGM Cable Glands (Heavy Duty)

Remora RGM Glands are designed to be used with mineral insulated cables. They are precision manufactured from high quality extrusion brass and approved for hazardous areas.

Hazardous: Atex Zones 1 & 2 EExd
Classification Ex II2G EExd IIC
Certification: BS EN 60702-1:2002 + A1:2015, BS EN 50014:1997 (A1-A2), BS EN 50018:2000 ATEX 2014/34/EU

Protection: IP54
Temperature Range: -20°C to 450°C
Material: Brass BS 2874



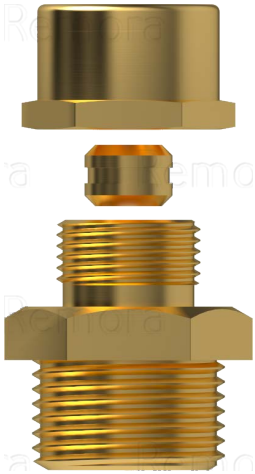

	Entry Thread		
Code	**Size**	**Length**	**Cap Diameter**
RGM2H1.5	M20 x 1.5	10.0	18.5
RGM2H2.5	M20 x 1.5	10.0	18.5
RGM2H4.0	M20 x 1.5	10.0	18.5
RGM2H4.0-M25	M25 x 1.5	10.0	24.0
RGM2H6	M20 x 1.5	10.0	18.5
RGM2H6-M25	M25 x 1.5	10.0	24.0
RGM2H10-M25	M25 x 1.5	10.0	24.0
RGM2H10-M32	M32 x 1.5	10.0	27.0
RGM3H1.5	M20 x 1.5	10.0	18.5
RGM3H2.5	M20 x 1.5	10.0	18.5
RGM3H2.5-M25	M25 x 1.5	10.0	24.0
RGM3H4.0	M20 x 1.5	10.0	18.5
RGM3H4-M25	M25 x 1.5	10.0	24.0
RGM3H6-M25	M25 x 1.5	10.0	24.0
RGM3H10-M25	M25 x 1.5	10.0	24.0
RGM3H10-M32	M32 x 1.5	10.0	27.0
RGM4H1.5	M20 x 1.5	10.0	18.5
RGM4H2.5	M20 x 1.5	10.0	18.5
RGM4H2.5-M25	M25 x 1.5	10.0	24.0
RGM4H4-M25	M25 x 1.5	10.0	24.0
RGM4H6-M25	M25 x 1.5	10.0	24.0
RGM4H6-M32	M32 x 1.5	10.0	27.0
RGM4H10-M25	M25 x 1.5	10.0	24.0
RGM4H10-M32	M32 x 1.5	10.0	27.0