

Dual-Fixing

Aluminium Two-Part Dual-Fixing

LM6 Aluminium

The Two Hole Cable Clamps are designed to fix cables 51mm to 114mm diameter. Manufactured from LM6 aluminium to BS1490. They are fully stackable and specifically designed to mount directly to channel, ladder or any flat surface.





Dual Fixing - Aluminium

- Fastening/fitting/routing single and multiple conductor low, medium and high voltage cables
- Excellent weathering and corrosion resistance
- Excellent stiffness
- Excellent tensile strength
- Fully recyclable

Standards: European Standard IEC 61914:2009

Temperature Range: -60°C to 150°C

Material: Aluminium LM6

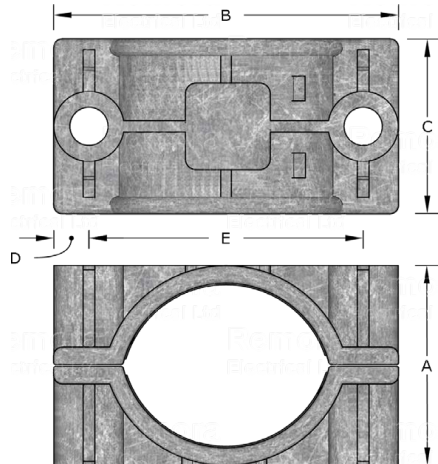

Aluminium Code	Cable Range			Dimensions				
	Min	Max	Stud Hole Size	(A)	(B)	(C)	(D)	(E)
2ALM10	51.0	57.0	2 x M10	68.0	96.0	49.0	10.0	76.0
2ALM11	57.0	64.0	2 x M10	75.0	96.0	49.0	10.0	76.0
2ALM12	64.0	70.0	2 x M10	84.0	134.0	64.0	10.0	114.0
2ALM13	70.0	76.0	2 x M10	90.0	134.0	64.0	10.0	114.0
2ALM14	76.0	83.0	2 x M10	96.0	142.0	64.0	14.0	114.0
2ALM15	83.0	89.0	2 x M10	102.0	142.0	64.0	14.0	114.0
2ALM16	89.0	95.0	2 x M10	114.0	154.0	76.0	14.0	126.0
2ALM17	95.0	101.0	2 x M10	120.0	154.0	76.0	14.0	126.0
2ALM18	101.0	108.0	2 x M10	134.0	169.0	76.0	14.5	140.0
2ALM19	108.0	114.0	2 x M10	140.0	169.0	76.0	14.5	140.0