

STAINLESS STEEL CABLE CLEATS



Vulcan+ Quad

Single or Dual-Fixing

Vulcan+ Quad cleats have a unique compact design so they can be easily installed, even when space is limited. Vulcan+ cleats are available in multiple sizes with range-taking capability, to suit trefoil, single, quad or bundled cables. Manufactured in Type 316L Stainless Steel, Vulcan offer excellent protection against the harshest environmental conditions. To protect and cushion the cables during short-circuit conditions, the cleat comes with an integral Low Smoke and Fume Zero Halogen Polymeric liner and base pad. We recommend fixing VRQ+ using one 10mm bolt for sizes 01 to 06, and one or two 10mm bolts for sizes 07 to 09. Alternative bolt recommendations on request.

316L Stainless Steel Quad Cleat


- Compact design
- Excellent weathering and corrosion resistance
- Excellent tensile strength
- Excellent stiffness

Standards: European Standard IEC 61914:2015
ABS DNV Type Approved, UL Listed

Max Short-Circuit: 115kA 600mm Spacing
134kA 300mm Spacing

Temperature Range: -40°C to 60°C

Material: 316L Stainless Steel / Polymeric Liner/Base Pad

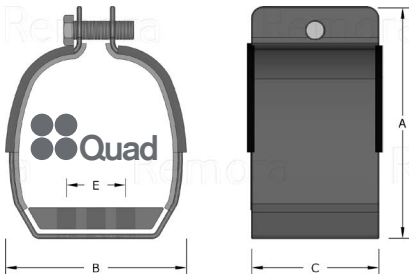

Code	Quad Cable Range		Dimensions				Fixing Holes	Weight (g)	Fixing Kit
	Min	Max	(A)	(B)	(C)	(E)			
VRQ+01	23.0	25.0	110.0	68.0	54.0	N/A	1 x M10	284	TCFK10-25
VRQ+02	26.0	27.0	113.0	70.0	54.0	N/A	1 x M10	286	TCFK10-25
VRQ+03	28.0	31.0	128.0	78.0	54.0	N/A	1 x M10	318	TCFK10-25
VRQ+03A	31.0	35.0	138.0	90.0	54.0	N/A	1 x M10	350	TCFK10-25
VRQ+04	35.0	42.0	148.0	103.0	54.0	N/A	1 x M10	378	TCFK10-25
VRQ+05	43.0	47.0	165.0	120.0	54.0	N/A	1 x M10	452	TCFK10-25
VRQ+06	48.0	50.0	170.0	121.0	54.0	N/A	1 x M10	467	TCFK10-25
VRQ+07	51.0	57.0	190.0	140.0	54.0	50.0	3 x M10	486	TCFK10-25
VRQ+08	58.0	63.0	200.0	150.0	54.0	50.0	3 x M10	499	TCFK10-25
VRQ+09	64.0	70.0	218.0	170.0	54.0	75.0	3 x M10	581	TCFK10-25



Fixing Kit (see p.218)

Call the Remora sales team at 01226 352 000

Challenge us - We find a solution