

HAZARDOUS AREA CCG™ CABLE GLANDS | Cable Glands

BARRIER INDOOR/OUTDOOR - UNARMoured

CCG Quick StopEx-F

The Quick StopEx-F Compression Barrier Gland is designed for use with unarmoured, elastomeric and plastic cables in indoors, outdoors and Group II hazardous areas. Quick StopEx-F resin forms a 100% barrier seal between the individual cores of the cable and an elastomeric displacement seals on outer sheath.

- For indoor and outdoor use in hazardous areas.
- Inspectable compound and flameproof chamber.
- Instantly mixed and injected Quick StopEx resin.
- Seals the cable outer sheath and around cable conductors to IP66 / IP68.
- Prevents explosive gases propagating through the cable.
- Precision manufactured from high quality brass.
- Supplied complete with IP sealing washer.


Hazardous: IECEx: Ex d IIC Gb, Ex e IIC Gb, Ex nR IIC Gc, Ex tb IIC Db
Classification: ATEX: II 2G, II 2D, II 3G, Ex db IIC Gb, Ex eb IIC Gb, Ex nR IIC Gc
Certification: IECEx ITA 12.0014X IEC 60079-0, IEC 60079-1, IEC 60079-2
 IEC60079-15, IEC60079-31
 ATEX TUV 13ATEX7397X EN 60079-0, EN60079-1, EN60079-7, EN 60079-8
 ATEX TUV 13ATEX7422X EN 60079-0, EN 60079-7



Protection: IP66 / IP68 (2m) IEC 60529
Temperature Range: -20°C to 95°C / -30°C to 120°C Extreme Temp Seals
Material (Gland): Brass / Nickel Plated Brass
Material (Seal): Thermoset Elastomer or Extreme Temperature Seals, Quick setting Barrier Resin



Code	Reference Size	Cable OD (B)		Gland Length (L2)	Dia Max (l)	Max Over Core	Max No. of Cores	Thread Entry (C)	Length (L1)
055016-UN	00 - 16	3.0	8.5	48.0	9.0	8.0	6.0	M16 x 1.5	15.0
055000-UN	00 - 20ss	3.0	8.5	48.0	12.2	10.9	12.0	M20 x 1.5	15.0
0550-0-UN	0 - 20s	7.0	12.0	51.0	12.2	10.9	12.0	M20 x 1.5	15.0
055001-UN	1 - 20	11.0	15.0	51.0	12.3	11.0	12.0	M20 x 1.5	15.0
055022-UN	2s - 25s	11.5	17.5	54.0	17.3	15.5	20.0	M25 x 1.5	15.0
055002-UN	2 - 25	15.0	20.0	54.0	17.3	15.5	20.0	M25 x 1.5	15.0
055033-UN	3s - 32s	16.0	22.0	56.0	24.3	21.7	40.0	M32 x 1.5	15.0
055003-UN	3 - 32	20.0	26.5	56.0	24.3	21.7	40.0	M32 x 1.5	15.0
055044-UN	4s - 40s	22.0	31.5	65.0	33.5	30.0	60.0	M40 x 1.5	15.0
055004-UN	4 - 40	26.0	34.0	65.0	33.5	30.0	60.0	M40 x 1.5	15.0
055055-UN	5s - 50s	29.0	38.0	73.0	40.6	36.3	80.0	M50 x 1.5	15.0
055005-UN	5 - 50	34.0	44.5	73.0	40.6	36.3	80.0	M50 x 1.5	15.0
055066-UN	6s -63s	38.0	50.0	85.0	53.6	47.9	100.0	M63 x 1.5	15.0
055006-UN	6 - 63	44.0	56.5	85.0	53.6	47.9	100.0	M63 x 1.5	15.0

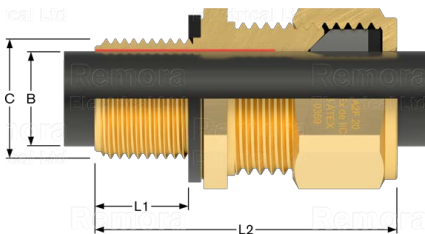

Call the Remora sales team at **01226 352 000**

Challenge us - We find a solution

Cable Glands
Accs.
Wiring Terminals
Tube Lugs
Tooling
Earthing/Lighting
Joining
Heat-shrink
Junction Boxes
Cable Cleats
Cable Ties
MCC Cable
Conduit
Fixing & Security