



CABLE CLEATS

Clingstrap

One-Part Single-Fixing

Standard Polypropylene LSZH Polypropylene

The Clingstrap Cable Cleat is a comprehensive range of single fixing cable cleats to provide a simple, but strong means of securing cables. Suitable for use with cables or pipes up to 5.0 - 50.8mm in diameter.

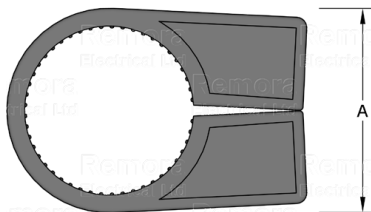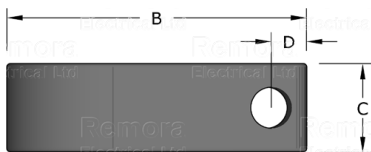

Clingstrap Cleats

- Fastening/fitting/routing single and multiple conductor low and medium voltage cables
- Excellent weathering and high resistance to ultraviolet light
- Excellent stiffness
- Fully recyclable

Standards: European Standard IEC 61914:2009

Temperature Range: -40°C to 40°C

Material: Polypropylene / LSZH Polypropylene



Standard Code	Low Smoke Code	Cable Range		Stud Hole Size	Dimensions			
		Min	Max		(A)	(B)	(C)	(D)
C3	C3LS	5.0	7.6	M6	12.0	25.0	15.0	6.0
C4	C4LS	7.7	10.0	M6	14.0	27.0	15.0	7.0
C5	C5LS	10.1	12.7	M6	16.0	29.0	15.0	8.0
C6	C6LS	12.6	15.2	M6	19.0	32.0	15.0	8.0
C7	C7LS	15.1	17.8	M6	23.0	36.0	16.0	8.0
C8	C8LS	17.7	20.3	M6	24.0	38.0	19.0	8.0
C9	C9LS	20.2	22.8	M6	27.0	42.0	19.0	8.0
C10	C10LS	22.7	25.4	M6	31.0	45.0	19.0	8.0
C11	C11LS	25.3	27.7	M6	33.0	50.0	22.0	9.0
C12	C12LS	27.6	30.5	M10	38.0	58.0	24.0	11.0
C14	C14LS	30.4	35.5	M10	44.0	64.0	25.0	11.0
C16	C16LS	35.4	40.6	M10	49.0	70.0	25.0	11.0
C18	C18LS	40.5	45.7	M10	53.0	74.0	25.0	11.0
C20	C20LS	45.6	50.8	M10	57.0	80.0	26.0	11.0