

Heatshrink

Adhesive Lined Dual Wall

Adhesive Lined Dual Wall Heatshrink is a semi-rigid, heat shrinkable polyolefin tubing that is co-extruded and selectively cross-linked to provide an integral, melt-able inner wall. Uses include strain relief for wire terminations, connections and harness breakouts.


Adhesive Lined Dual Wall Heatshrink

Adhesive Lined Heatshrink is designed to insulate and seal electrical and mechanical products against water and moisture. Dual-Wall 3:1 shrink ratio, flame-retardant, inner liner of hot melt adhesive. UL approved and RoHS compliant.


Temperature Range: -45°C to 125°C

Material: Flame Retardant Polyolefin

Colour: Black or Red

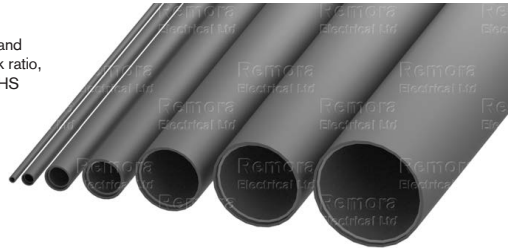

Code	Diameter	Internal Diameter		Shrunk Wall Thickness	Bulk Reel Length (m)
		Max Before Shrink	Min After Shrink		
HSAL3*	3.0	3.0	1.0	1.0	1.2
HSAL6*	6.0	6.0	2.0	1.0	1.2
HSAL12*	12.0	12.0	4.0	1.6	1.2
HSAL19*	19.0	19.0	6.0	2.2	1.2
HSAL30*	30.0	30.0	10.0	2.4	1.2
HSAL40*	40.0	40.0	13.0	2.4	1.2
HSAL50*	50.0	50.0	19.0	2.4	1.2

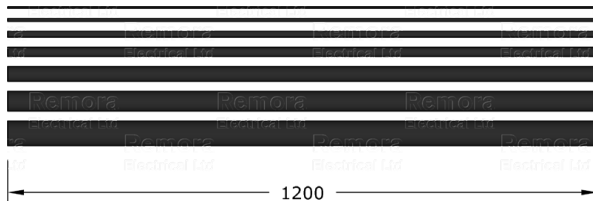

How To Order

HSAL19 - R

↑ Code prefix ↑ Colour
 B = Black
 R = Red

Call the Remora sales team at **01226 352 000**

Challenge us - We find a solution

Cable Glands
 Accs.
 Wiring Terminals
 Tube Lugs
 Tooling
 Earthing/Lighting
 Joining
 Heat-shrink
 Junction Boxes
 Cable Cleats
 Cable Ties
 MCC Cable
 Conduit
 Fixing & Security