

HAZARDOUS AREA CCG™ CABLE GLANDS | Cable Glands

BARRIER INDOOR/OUTDOOR - UNARMoured

CCG A2EX QuickStop-Ex® Barrier Gland

The A2EX QuickStop-Ex Compression Barrier Gland is designed for use with unarmoured, elastomeric and plastic cables in indoors, outdoors and Group II and III hazardous areas. A2EX QuickStop-Ex resin forms a 100% barrier seal between the individual cores of the cable and an elastomeric displacement seals on outer sheath.

- For indoor, outdoor, Group II, III, Zone 1, 2, 21 and 22 hazardous areas.
- Inspectable compound and flame-proof chamber.
- Instantly mixed Resin forms a 100% seal around the individual cores of the cable.
- Seals the cable outer sheath and around cable conductors to IP66 / IP68.
- Prevents explosive gases propagating through the cable.
- Precision manufactured from high quality brass.
- Supplied complete with IP sealing washer.

Hazardous: IEC Ex: Ex db IIC Gb, Ex eb IIC Gb, Ex nR IIC Gc, Ex tb IIIC Db
Classification: ATEX: #II 2GD, II 3G, Ex db IIC Gb, Ex eb IIC Gb, Ex tb IIIC Db, Ex nR IIC Gc
Certification: IECEx CML 18.0018X IEC 60079-0, IEC 60079-1, IEC 60079-7 IEC60079-15, IEC60079-31 EN 60079-0, EN60079-1, EN60079-7, EN 60079-0, EN 60079-7

CML 16ATEX1001X
 CML 16ATEX4002X



EMC Compatible: SGS EMC197708/1

Protection: IP66 / IP68 (2m) IEC 60529

Temperature Range: -50°C to 95°C / -50°C to 120°C Extreme Temp Seals


Material (Gland): Brass / Nickel Plated Brass

Material (Seal): Thermoset Elastomer or Extreme Temperature Seals, Quick setting



Code	Reference Size	Cable OD (B)		Gland Length (L2)	Max Over Core	Max No. of Cores	Thread Entry (C)	Thread Length (L1)
		Min	Max					
056416A-UN	00 - 16	3.0	8.5	40.0	8.0	6.0	M16 x 1.5	15.0
056400A-UN	00 - 20ss	3.0	8.5	40.0	10.9	6.0	M20 x 1.5	15.0
0564-0A-UN	0 - 20s	7.0	12.0	40.0	10.9	6.0	M20 x 1.5	15.0
056401A-UN	1 - 20	11.0	15.0	45.0	12.5	13.0	M20 x 1.5	15.0
056422A-UN	2s - 25s	11.5	17.5	45.0	15.5	20.0	M25 x 1.5	15.0
056402A-UN	2 - 25	15.0	20.0	45.0	15.5	20.0	M25 x 1.5	15.0
056433A-UN	3s - 32s	16.0	22.0	45.0	21.7	40.0	M32 x 1.5	15.0
056403A-UN	3 - 32	20.0	26.5	45.0	21.7	40.0	M32 x 1.5	15.0
056444A-UN	4s - 40s	22.0	31.5	53.0	30.0	60.0	M40 x 1.5	15.0
056404A-UN	4 - 40	26.0	34.0	53.0	30.0	60.0	M40 x 1.5	15.0
056455A-UN	5s - 50s	29.0	38.0	61.0	36.3	80.0	M50 x 1.5	15.0
056405A-UN	5 - 50	34.0	44.5	61.0	36.3	80.0	M50 x 1.5	15.0
056466A-UN	6s - 63s	38.0	50.0	67.0	47.9	100.0	M63 x 1.5	15.0
056406A-UN	6 - 63	44.5	56.5	67.0	47.9	100.0	M63 x 1.5	15.0

X109-114 QuickStop-EX Injection Resin Cartridge (24ml)

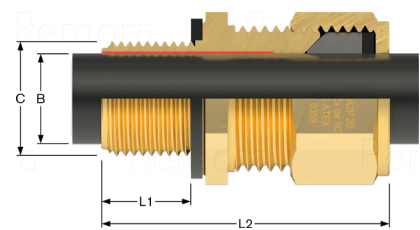

Size	Glands per Resin Cartridge	Size	Glands per Resin Cartridge
00 - 16ss	8	4s - 40s	1
00 - 20ss	8	4 - 40	1
0 - 20s	6	5s - 50s	0.5
1 - 20	5	5 - 50	0.5
2s - 25s	5	6s - 63s	0.5
2 - 25	3	6 - 63	0.5
3s - 32s	2		
3 - 32	2		

Call the Remora sales team at **01226 352 000**

Visit www.remora.net for full fitting instructions