

INDOOR/OUTDOOR - STEEL WIRE ARMOUR


CW ArmaKit Industrial Grade Low Smoke

Steel Wire Armour

Low Smoke and Acid Fume Emission

The ArmaKit® CW Gland is a three-part gland designed for use with all Steel Wire Armoured PVC and LS cables. The integral polychloroprene environmental seal provides full protection against high power jets of liquid and is 100% dust tight. The separate cone-and-ring design of the three-part ArmaKit® CW Gland prevents twisting of the armour wires during installation and an internal brass washer ensures the seal will not deform as the glands are torqued down.

Cable retention and earth continuity is achieved via mechanical clamping of the cable armour by the internal cone-and-ring.

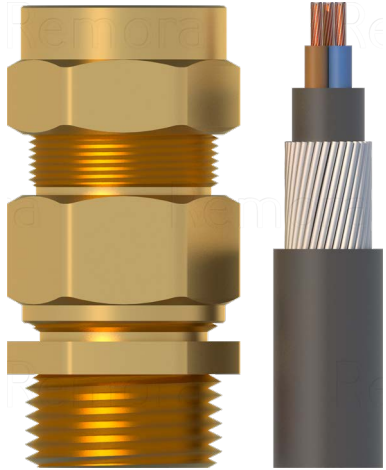

ArmaKit® CW Gland Kits

- For indoor or outdoor use.
- Three-part handling.
- Precision manufactured from high quality extrusion brass.
- Supplied in kits containing;
 - M20ss-M32 2 glands, 2 locknuts, 2 earth tags, 2 LS shrouds
 - M40-M75 1 gland, 1 locknut, 1 earth tag, 1 LS shroud

Standards: EN 60529
EN 50262


Protection: IP54
IP66 (If fitted with sealing washer)

Temperature Range: -20°C to 80°C

Material (Gland): Brass BS 2874 CZ121 Pb3

Material (Seal): Polychloroprene

Material (Shroud): LS Polyvinyl-chloride

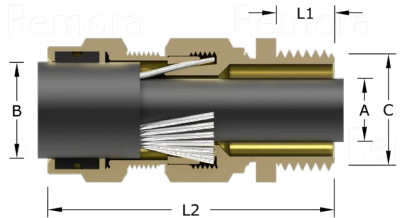

Code	Bedding				Cable OD (B)	Entry Thread	Gland	Box Qty	Carton Qty		
	Max (A)	Min	Max	Armour Dia						Length (L1)	Length (L2)
PGPCW20ssLS	9.0	8.5	13.5	0.90	M20 x 1.5	10.0	48.0	24.0	26.6	10	80
PGPCW20sLS	11.8	12.8	15.5	0.90	M20 x 1.5	10.0	48.0	24.0	26.6	10	80
PGPCW20LS	13.6	15.5	19.5	0.90	M20 x 1.5	10.0	49.0	27.0	30.0	10	60
PGPCW25LS	20.0	22.0	26.5	1.25	M25 x 1.5	10.0	54.0	35.0	38.8	5	40
PGPCW32LS	26.5	26.0	33.5	1.60	M32 x 1.5	10.0	58.0	43.0	47.7	5	30
PGPCW40LS	32.1	33.0	39.5	1.60	M40 x 1.5	15.0	67.0	51.0	56.6	5	30
PGPCW50sLS	37.0	39.5	45.0	2.00	M50 x 1.5	15.0	70.0	58.0	64.4	2	24
PGPCW50LS	42.4	45.0	52.0	2.00	M50 x 1.5	15.0	70.0	63.0	70.0	2	24
PGPCW63sLS	48.5	52.0	59.0	2.50	M63 x 1.5	15.0	75.0	72.0	80.0	2	24
PGPCW63LS	55.2	59.0	66.0	2.50	M63 x 1.5	15.0	75.0	79.0	87.7	2	12
PGPCW75sLS	60.0	66.0	70.0	2.50	M75 x 1.5	20.0	86.0	90.0	100.0	1	8
PGPCW75LS	67.7	70.0	78.0	2.50	M75 x 1.5	20.0	86.0	98.0	108.8	1	8