

Copper Tube Lugs | STANDARD COPPER TUBE TERMINALS

COPPER TUBE TERMINALS

Copper Lugs

Copper Tube Lugs 120mm² to 1000mm² 600/1000V

Crimped termination of cables has long since replaced soldered ends, providing a clean, easy and reliable electrical and mechanical connection. Care must be taken when selecting the correct crimping tool and dies to ensure the correct compression of the copper lug.



Remora Copper Tube Lugs are manufactured from precision drawn seamless copper tube to BS EN 12449:1999. All standard types in the range between 1.5mm² and 240mm² have bell mouth entries to ensure ease of entry, even with flexible conductors. All Copper Tube Lugs are tin plated to BS 1872 Part 2 for corrosion resistance and suitable for use up to 200°C.

Nickel plated lugs are available for high temperature applications up to 343°C.

Temperature Range: up to 200°C

Material: BS EN 12449:1999

Plating: Tin BS 1872 Part 2

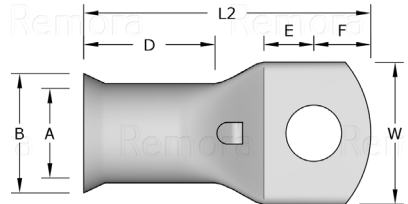

Code	Cable Size mm ²	Stud Size	(A)	(B)	(W)	(E)	(F)	(D)	(L2)	Palm Thickness
120-8	120	8	15.0	19.0	27.3	14.0	9.6	20.0	55.0	4.0
120-10	120	10	15.0	19.0	27.3	14.4	9.6	20.0	55.0	4.0
120-12	120	12	15.0	19.0	27.3	14.0	10.0	20.0	55.0	4.0
120-14	120	14	15.0	19.0	27.3	13.2	10.8	20.0	55.0	4.0
120-16	120	16	15.0	19.0	27.3	13.0	13.0	20.0	60.0	4.0
150-10	150	10	16.5	21.0	30.2	14.0	10.0	23.0	61.0	4.5
150-12	150	12	16.5	21.0	30.2	14.0	10.0	23.0	61.0	4.5
150-14	150	14	16.5	21.0	30.2	13.2	10.8	23.0	61.0	4.5
150-16	150	16	16.5	21.0	30.2	13.0	13.0	23.0	61.0	4.5
185-10	185	10	18.5	23.0	33.3	15.5	9.2	29.0	66.5	4.5
185-12	185	12	18.5	23.0	33.3	15.5	9.2	29.0	68.0	4.5
185-14	185	14	18.5	23.0	33.3	15.5	9.2	29.0	68.0	4.5
185-16	185	16	18.5	23.0	33.3	13.0	13.0	29.0	70.0	4.5
240-10	240	10	21.0	26.0	37.7	18.0	17.0	32.0	88.0	5.0
240-12	240	12	21.0	26.0	37.7	18.0	17.0	32.0	88.0	5.0
240-14	240	14	21.0	26.0	37.7	18.0	17.0	32.0	88.0	5.0
240-16	240	16	21.0	26.0	37.7	18.0	17.0	32.0	88.0	5.0
240-20	240	20	21.0	26.0	37.7	18.0	17.0	32.0	88.0	5.0