




# Trefoil

## Dual-Fixing

Two Bolt Fixing Aluminium Trefoil Cleat is designed for cleating three single cables in a trefoil configuration where low to medium short circuit withstand levels are required. The range covers cables from 24mm to 76mm overall diameter.

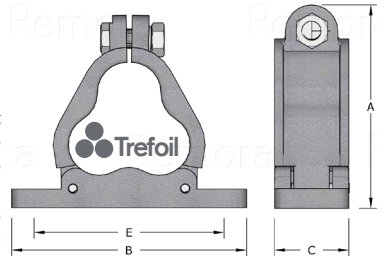

### Dual Bolt Fixing - Aluminium

**Standards:** European Standard IEC 61914:2009

**Temperature Range:** -60°C to 150°C

**Material:** Aluminium LM6



Aluminium Code	Cable Range		Stud Hole Size	Dimensions				Weight (g)
	Min	Max		(A)	(B)	(C)	(E)	
376AB01	24.0	25.0	2 x M10	94.0	128.0	38.0	102.0	276
376AB02	25.0	27.0	2 x M10	97.0	128.0	38.0	102.0	284
376AB03	27.0	28.0	2 x M10	100.0	128.0	38.0	102.0	291
376AB04	28.0	30.0	2 x M10	103.0	130.0	38.0	104.0	298
376AB05	30.0	32.0	2 x M10	105.0	133.0	38.0	107.0	305
376AB06	32.0	34.0	2 x M10	106.0	135.0	38.0	109.0	312
376AB07	34.0	35.0	2 x M10	109.0	137.0	38.0	110.0	319
376AB08	35.0	36.0	2 x M10	113.0	138.0	38.0	113.0	326
376AB09	36.0	38.0	2 x M10	116.0	140.0	38.0	114.0	333
376AB10	38.0	40.0	2 x M10	119.0	145.0	38.0	118.0	340
376AB11	40.0	41.0	2 x M10	122.0	147.0	38.0	121.0	347
376AB12	41.0	43.0	2 x M10	124.0	149.0	38.0	123.0	354
376AB13	43.0	44.0	2 x M10	127.0	150.0	38.0	124.0	369
376AB14	44.0	46.0	2 x M10	130.0	154.0	38.0	128.0	383
376AB15	46.0	48.0	2 x M10	133.0	156.0	38.0	129.0	390
376AB16	48.0	49.0	2 x M10	137.0	159.0	38.0	133.0	397
376AB17	49.0	51.0	2 x M10	140.0	165.0	38.0	135.0	404
376AB18	51.0	53.0	2 x M10	143.0	165.0	38.0	137.0	411
376AB19	53.0	54.0	2 x M10	146.0	172.0	38.0	141.0	418
376AB20	54.0	55.5	2 x M10	155.0	183.0	44.0	152.0	560
376AB21	55.5	57.0	2 x M10	158.0	187.0	44.0	155.0	574
376AB22	57.0	59.0	2 x M10	160.0	189.0	44.0	157.0	588
376AB23	59.0	60.0	2 x M10	163.0	191.0	44.0	160.0	602
376AB24	60.0	62.0	2 x M10	165.0	194.0	44.0	162.0	617
376AB25	62.0	63.5	2 x M10	168.0	196.0	44.0	165.0	631
376AB26	63.5	65.0	2 x M10	172.0	199.0	44.0	168.0	645
376AB27	65.0	66.5	2 x M10	176.0	202.0	44.0	170.0	667
376AB28	66.5	68.0	2 x M10	178.0	205.0	44.0	173.0	687
376AB29	68.0	70.0	2 x M10	181.0	208.0	44.0	176.0	716
376AB30	70.0	71.5	2 x M10	187.0	215.0	44.0	183.0	745
376AB31	71.5	73.0	2 x M10	190.0	217.0	44.0	186.0	758
376AB32	73.0	74.5	2 x M10	193.0	220.0	44.0	188.0	773
376AB33	74.5	76.0	2 x M10	197.0	222.0	44.0	191.0	787