


Terminals | PRE-INSULATED SPADE TERMINALS

PRE-INSULATED CRIMP TERMINALS

Pre-Insulated Spade Terminals


Made from oxygen-free high conductivity copper, these terminals are electro-tin plated for excellent conductivity and resistance to corrosion. Push-on terminals are made from brass, the insulated types have an additional internal copper sleeve, ensuring insulation support and a good crimp joint.

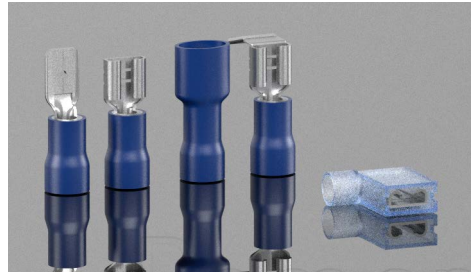

Pre-Insulated Male Spade Terminals

Pre-insulated male spade terminals.

Temperature Range: -10°C to 75°C
Material: Tin Plated Electrolytic Copper/Vinyl
Voltage: 300V
Colour: Red, Blue, Yellow




Code	Colour	Range mm ²	Tab	ID (A)	Length (L1)	Length (L2)	Width (W)
RTAB28	Red	0.5-1.5	2.8	1.7	11.3	18.7	2.8
RTAB48		0.5-1.5	4.8	1.7	11.3	19.2	4.8
RTAB63		0.5-1.5	6.35	1.7	11.3	20.8	6.35
BTAB48	Blue	1.5-2.5	4.75	2.3	11.3	19.2	4.8
BTAB63		1.5-2.5	6.35	2.3	11.3	20.8	6.40
YTAB63		4.0-6.0	6.35	3.4	11.0	24.0	6.35

Pre-Insulated Female Spade Terminals

Pre-insulated female spade terminals.

Temperature Range: -10°C to 75°C
Material: Tin Plated Electrolytic Copper/Vinyl
Voltage: 300V
Colour: Red, Blue, Yellow



Code	Colour	Range mm ²	ID (A)	Length (L1)	Length (L2)	Width (W)
RFS28-5	Red	0.5-1.5	1.7	10.5	18.8	3.2
RFS28-8		0.5-1.5	1.7	10.5	18.8	3.2
RFS48-5		0.5-1.5	1.7	10.5	19.0	5.0
RFS48-8		0.5-1.5	1.7	10.5	19.0	5.0
RFS63		0.5-1.5	1.7	10.5	20.8	6.6
BFS48-5	Blue	1.5-2.5	2.3	10.5	19.0	5.0
BFS48-8		1.5-2.5	2.3	10.5	19.0	5.0
BFS63		1.5-2.5	2.3	10.5	20.8	6.6
BFS83		1.5-2.5	2.3	10.5	24.5	8.2
YFS63		4.0-6.0	3.4	13.0	23.8	6.6
YFS95	Yellow	4.0-6.0	3.4	13.0	30.0	10.0