

Heatshrink

Adhesive Lined Dual Wall

Adhesive Lined Dual Wall Heatshrink is a semi-rigid, heat shrinkable polyolefin tubing that is co-extruded and selectively cross-linked to provide an integral, melt-able inner wall. Uses include strain relief for wire terminations, connections and harness breakouts.

Adhesive Lined Dual Wall Heatshrink

Adhesive Lined Heatshrink is designed to insulate and seal electrical and mechanical products against water and moisture. Dual-Wall 3:1 shrink ratio, flame-retardant, inner liner of hot melt adhesive. UL approved and RoHS compliant.


- Medium Wall 3:1 Shrink Ratio

Temperature Range: -55°C to 110°C

Material: Flame Retardant Polyolefin (UL94 - V0)

Shrinkage Temp: 120°C

Colour: Black

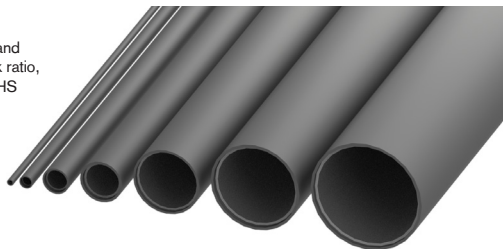

Code	Nominal	Internal Diameter		Shrunk	
	Diameter	Max Before Shrink	Min After Shrink	Wall Thickness	Length (m)
HSAL3-B	3.0	3.0	1.0	1.0	1.2
HSAL6-B	6.0	6.0	2.0	1.2	1.2
HSAL12-B	12.0	12.0	4.0	1.7	1.2
HSAL19-B	19.0	19.0	6.0	2.0	1.2
HSAL30-B	30.0	33.0	10.0	2.4	1.2
HSAL40-B	40.0	40.0	13.0	2.5	1.2
HSAL50-B	50.0	52.0	19.0	2.5	1.2

