
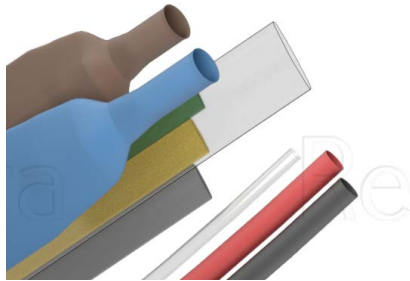


HEATSHRINK SLEEVING

Heatshrink

Polyolefin Heatshrink

Remora Heatshrink is a cost effective commercial grade tube used for most applications. Flexible, single thin wall, 2:1 ratio, low shrinkage temperature. Manufactured from high quality irradiation cross-linked Polyolefin heatshrink tubing and sleeving and the range is UL approved and RoHS compliant.

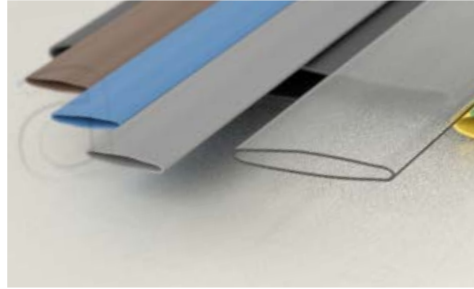

Polyolefin Heatshrink

With excellent electrical and mechanical properties, it is flexible and has a low shrinkage temperature. Applications include general electrical insulation, mechanical protection, cable and harness bundling, sleeving and colour identification. It is widely used in electrical, electronic, automotive, mechanical and general commercial industries. Remora's heat shrink tubing and sleeving is available in sizes from 1.5mm to 80mm internal diameter and is available in nine different colours. Supplied in lengths of 1m up to complete reel lengths of 30m plus. Remora Heatshrink tube is also available as a in the Mini Kit RMK1.

Shrink Temperature: 90°C

Temperature Range: -55°C to 125

Material: Flame Retardant Self Extinguishing Polyolefin

Colour: Black, Blue, Brown, Clear, Grey, Green, Green/Yellow, Red, Yellow



Code	Internal Diameter		Shrunk Wall Thickness	Supplied Form	Bulk Reel Length (m)
	Max Before Shrink	Min After Shrink			
HS3*	3.2	1.6	0.50	Round	150
HS4*	4.8	2.4	0.50	Round	150
HS6*	6.4	3.2	0.65	Round	75
HS9*	9.5	4.7	0.65	Flat 15	75
HS12*	12.7	6.4	0.65	Flat 20	75
HS20*	19.1	9.5	0.75	Flat 30	60
HS25*	25.4	12.7	0.90	Flat 40	60
HS40*	40.0	20.0	1.00	Flat 67	50
HS50*	50.0	25.0	1.00	Flat 63	50
HS80*	80.0	40.0	1.20	Flat 130	30

• Also available per meter

How To Order

HS20 - BL

Code prefix

Colour

B = Black
 BL = Blue
 BR = Brown
 G = Grey
 GR = Green
 GY = Green/Yellow
 R = Red
 W = White
 Y = Yellow