

### Connector Strips - 12 Way

Package contains 10x Electrical Connector Strips (12 Ways per strip)  
Easy-Cut, Captive Screws & Raised for Easy Wiring. Screw holes between each block for quick and secure mounting. Each terminal block has the Current and Voltage rating imprinted below the terminal strip. This allows you to quickly identify the terminal block, should you forget in the future. Transparent design allows for safe and efficient connection.

**Temperature Range:** -15 to +80°C

**Material:** Polyethylene (PE) Housing / Galvanised Steel Screws / Brass Housing


**Colour:** Natural

Supplied in packs of 10



• Supplied in packs of 10

Code	Sector mm <sup>2</sup>	Rated Current	Rated Voltage	(L)	Width (W)	Dai 1	Dia 2	(D)	(H)
12WSC3A	4.0	3 Amp	380V	93.0	16.8	2.8	2.3	7.8	13.6
12WSC5A	6.0	5 Amp	380V	115.0	18.8	3.3	2.6	10.0	15.0
12WSC10A	10.0	10 Amp	400V	129.0	20.7	4.3	2.8	11.0	16.2
12WSC15A	12.0	15 Amp	400V	137.0	22.5	4.5	2.8	12.0	18.8
12WSC30A	16.0	30 Amp	400V	165.0	25.5	5.5	3.0	14.0	19.8
12WSC60A	25.0	60 Amp	400V	187.0	31.2	6.5	3.8	16.5	25.5

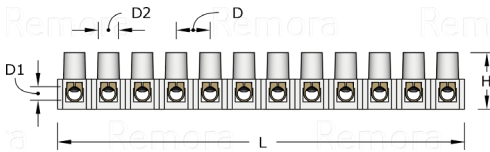

### Lever Push-Fit Terminal Blocks

This innovative solution has been developed to offer faster termination of cables into the terminal block safely and consistently. Transparent case provides a clear view to see connections. Ergonomic easy-open levers. Speeds up installation of fine stranded conductors.

• 2, 3 and 5 way options

• Test slots for continuity and voltage testing.

**Rating:** 32A / 450V


**Temperature:** 85°C

**Material:** Polycarbonate UL94 V2

**Standards:** IEC EN 60998-1, 60998-2-2



0.2 - 4mm <sup>2</sup> Strand	
0.2 - 4mm <sup>2</sup> Solid	
0.34 - 4mm <sup>2</sup> Fine	



Code	Conductors	Conductor Type	Rating	Length (L)	Width (W)	Height (H)
VID-UC-02	2	Solid, Stranded or Fine	32A / 450V	18.6	13.1	10.5
VID-UC-03	3	Solid, Stranded or Fine	32A / 450V	18.6	18.7	10.5
VID-UC-05	5	Solid, Stranded or Fine	32A / 450V	18.6	29.9	10.5