


Remora



# BWL ArmaKit

## Industrial Grade Low Smoke

### Heavy Duty Steel Wire Armour Cable Glands

#### Low Smoke and Acid Fume Emission

The ArmaKit® BWL Gland is a three-part brass cable gland designed for use with all Steel Wire Armoured PVC and LS cables. Heavier than the standard BW the BWL offers increased resistance to mechanical impact and has a longer body, providing greater protection to the armour wires from damage and impact. The three-part design of the BWL also prevents twisting of the armour wires during installation.

BW glands do not have an inner seal and as such provide minimal ingress protection against dust and liquid, they are only recommended for use in indoor, liquid and dust-free environments.

Cable retention and earth continuity is achieved via mechanical clamping of the cable armour.

### ArmaKit® BWL Gland Kits

- For indoor use.
- Three-part handling, increased cable safety.
- Heavy Duty, increased cable protection.
- Precision manufactured from high quality extrusion brass.
- Supplied in kits containing;
- M20s-M32 2 glands, 2 locknuts, 2 earth tags, 2 LS shrouds
- M40-M75 1 gland, 1 locknut, 1 earth tag, 1 LS shroud

**Standards:** EN 60529


BS 6121-1:2005

**Protection:** IP2X

**Temperature Range:** -80°C to 300°C

**Material (Gland):** Brass BS 2874 CZ121 Pb3

**Material (Shroud):** LS Polyvinyl-chloride

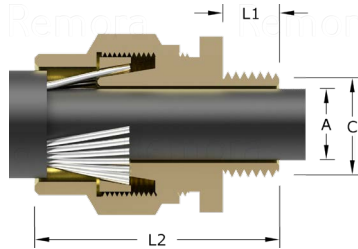

	Bedding OD	Cable OD	Armour Dia		Entry Thread		Gland			Box	Carton
Code	Max (A)	Max	Min	Max	Size (C)	Length (L1)	Length (L2)	A/F	A/C	Qty	Qty
BWLK2/M20/M20sLS	11.8	15.8	0.9	1.25	M20 x 1.5	10.0	36.0	24.0	26.6	10	50
BWLK2/M20/M20LS	13.8	20.8	0.9	1.25	M20 x 1.5	10.0	38.0	30.0	33.3	8	50
BWLK2/M25/M25LS	19.8	27.5	1.25	1.60	M25 x 1.5	10.0	40.0	38.0	42.2	5	50
BWLK2/M32/M32LS	26.4	33.5	1.6	2.00	M32 x 1.5	10.0	43.0	46.0	51.0	5	30



Supplied in kits containing;

- M16-M32 2 glands, 2 locknuts, 2 shrouds
- M40-M75 1 gland, 1 locknut, 1 shroud



Call the Remora sales team at **01226 352 000**

Challenge us - We find a solution