

HAZARDOUS AREA CCG™ CABLE GLANDS | Cable Glands

CORROSION RESISTANT INDOOR/OUTDOOR - FLEXIBLE WIRE BRAID

CCG POSI BRAID™ Cable Gland

The POSI BRAID™ Gland is designed for use in highly corrosive and wet locations where a hazardous area certification is required. The brass gland is encapsulated within a corrosion resistant non-metallic body. Suitable for use with braided cables.

- For indoor and outdoor use.
- Extreme corrosion resistance.
- Electroless nickel plated entry thread.
- Specially formulated tough gripper seal.
- Deluge proof O-ring and elastomeric inner seal.
- Precision manufactured from high quality brass.
- Supplied complete with IP sealing washer.

Hazardous: SANS IEC: Zone 1, 2, 21, and 22, Ex e IIC DIP A21
ATEX: Category 2, Category 3, Ex e II 2 GD, IIC
Certification: DEMKO 01 ATEX 130325X EN50014, EN50019, EN50281-1-1, EN50018
SABS S/W 457U SANS 60079-0, SANS 60079-7, SANS 60079-9
SANS 60529, SANS 61241.1




EMC Compatible: SGS EMC197708/1

Protection: IP66 / IP68


Temperature Range: -30°C to 80°C

Material (Gland): Brass (Nickel Plated) Encapsulated in Glass Reinforced Polyester

Material (Seal): Thermoset Elastomer

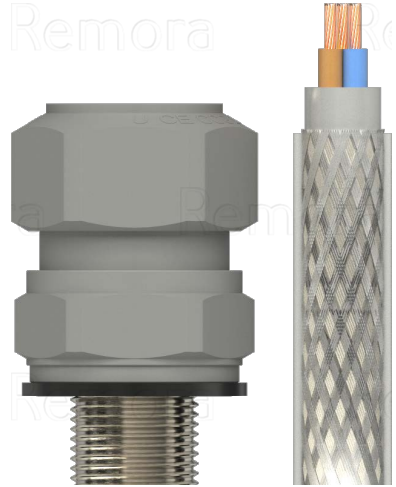

Code	Low Smoke LS Kit Code	Reference Size	Cable OD (B)		Gland Length (L2)	Armour Dia		Thread Entry (C)	Length (L1)	A/F	A/C
			Min	Max		Min	Max				
054400-B	GPCKXT00LS	00 - 20ss	3.0	8.0	57.0	0.20	0.30	M20 x 1.5	15.0	28.0	32.0
05440-B	GPCKXT0LS	0 - 20s	8.0	12.0	57.0	0.20	0.30	M20 x 1.5	15.0	30.0	34.0
054401-B	GPCKXT1LS	1 - 20	11.0	15.5	61.0	0.20	0.30	M20 x 1.5	15.0	34.0	38.0
054402-B	GPCKXT2LS	2 - 25	15.0	20.2	66.0	0.20	0.45	M25 x 1.5	15.0	42.0	47.0
054403-B	GPCKXT3LS	3 - 32	20.0	26.5	75.0	0.20	0.45	M32 x 1.5	15.0	52.0	59.0
054404-B	GPCKXT4LS	4 - 40	26.0	34.5	85.0	0.30	0.45	M40 x 1.5	20.0	62.0	70.0
054405-B	GPCKXT5LS	5 - 50	34.0	44.5	95.0	0.40	0.45	M50 x 1.5	20.0	74.0	83.0
054406-B	GPCKXT6LS	6 - 63	44.0	57.0	127.0	0.40	0.45	M63 x 1.5	20.0	95.0	107.0
054407-B	GPCKXT7LS	7 - 75	56.0	68.0	127.0	0.40	0.45	M75 x 1.5	20.0	110.0	124.0

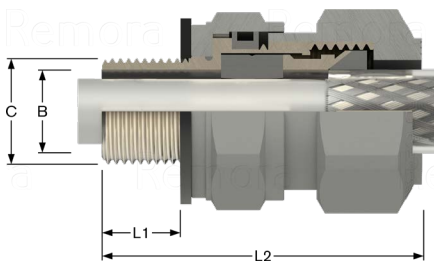

Kits and Accessories

POSI BRAID Glands can also be supplied in kits complete with;
2 glands, 2 locknuts, 2 earhtags (M16-M32)
1 gland, 1 locknut, 1 earhtag (M40-M75)



Call the Remora sales team at 01226 352 000

Challenge us - We find a solution