

Cable Glands | HAZARDOUS AREA CCG™ CABLE GLANDS

CORROSION RESISTANT INDOOR/OUTDOOR - UNARMoured

CCG POSI GRIP™ Cable Gland

The POSI GRIP™ Gland is designed for use in highly corrosive and wet locations where a hazardous area certification is required. The brass gland is encapsulated within a corrosion resistant non-metallic body. Suitable for use with unarmoured elastomeric and plastic cables.

- For indoor and outdoor use.
- Extreme corrosion resistance.
- Electroless nickel plated entry thread.
- Specially formulated tough gripper seal.
- Deluge proof O-ring and elastomeric inner seal.
- Precision manufactured from high quality brass.
- Supplied complete with IP sealing washer.

Hazardous: IECEx: Ex d IIC Gb, Ex e IIC Gb, Ex nR IIC Gc, Ex tb IIIC Db
Classification: ATEX: II 2G, II 2D, II 3G, Ex db IIC Gb, Ex eb IIC Gb, Ex tb IIIC Db, Ex nRIIC Gc
Certification: IECEx ITA 12.0014X IEC 60079-0, IEC 60079-1, IEC 60079-2, IEC 60079-3, IEC 60079-15, IEC 60079-31
 CML 16ATEX1001X EN 60079-0, EN60079-1, EN60079-7, EN 60079-31
 CML 16ATEX4002X EN 60079-0, EN 60079-15
 MASC MS/13-028X SANS/IEC 60079-0, SANS/IEC 60079-1
 SANS/IEC 60079-7, SANS/IEC 60079-15
 SANS/IEC 60079-31



Marine: ABS 14-SG246753-2-PDA / DNV-GL TAE0000010


Protection: IP66 / IP68

Temperature Range: -20°C to 95°C IEC 60529

Material (Gland): Brass (Nickel Plated)

Material (Shroud): Glass Reinforced Polyester / PBT


Material (Seal): Thermoset Elastomer

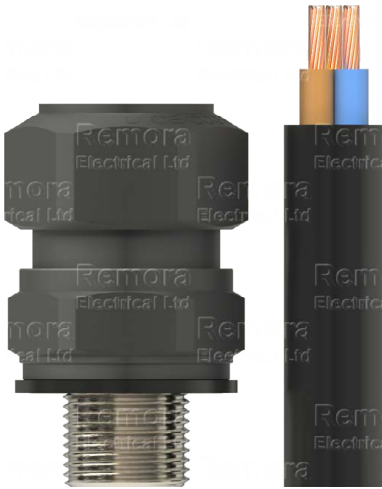

Code	LS Kit Code	Reference Size	Cable OD (B)		Gland Length (L2)	Thread Entry (C)	Length (L1)	A/F	A/C
			Min	Max					
054500	GPGRIP00LS	00 - 20ss	3.0	8.5	57.0	M20 x 1.5	15.0	30.0	34.0
0545-0	GPGRIP0LS	0 - 20s	7.0	12.0	57.0	M20 x 1.5	15.0	30.0	34.0
054501	GPGRIP1LS	1 - 20	9.0	15.0	61.0	M20 x 1.5	15.0	34.0	38.0
054502	GPGRIP2LS	2 - 25	14.0	20.0	66.0	M25 x 1.5	15.0	42.0	47.0
054503	GPGRIP3LS	3 - 32	19.0	26.5	75.0	M32 x 1.5	15.0	52.0	59.0
054504	GPGRIP4LS	4 - 40	26.0	34.0	80.0	M40 x 1.5	15.0	62.0	70.0
054505	GPGRIP5LS	5 - 50	34.0	44.5	90.0	M50 x 1.5	15.0	74.0	83.0
054506	GPGRIP6LS	6 - 63	44.0	56.5	122.0	M63 x 1.5	15.0	95.0	107.0
054507	GPGRIP7LS	7 - 75	56.0	67.5	122.0	M75 x 1.5	15.0	111.0	125.0

Kits and Accessories

POSI GRIP Glands can also be supplied in kits complete with;
 2 glands & 2 locknuts (M16-M32)
 1 gland & 1 locknut (M40-M75)

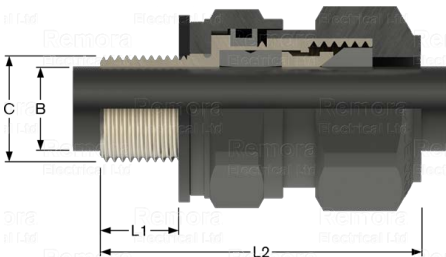

CCG® brand cable glands are offered for sale exclusively in the United Kingdom by Remora Electrical Limited.