

Cable Glands | INDUSTRIAL CCG® CABLE GLANDS

INDOOR/OUTDOOR - STEEL WIRE ARMOUR



CCG CW Cable Gland

The CW Gland is designed for use with Steel Wire Armoured cables for general indoor/outdoor use where a seal on the outer sheath is required to obtain an IP rating. The gland features two-piece handling, no loose parts & freely rotating captive cone providing an armour clamp and earth bond without twisting the armouring. Seals on the cable sheath to IP66 if fitted with a sealing washer.

- For indoor and outdoor use.
- Two-part handling, no loose parts.
- Freely rotating captive cone, providing an armour clamp and earth bond without twisting the armouring.
- Patented disconnect armour clamp system for ease of inspection.
- Supplied complete with IP sealing washer.

Standards: EN 50262 IEC/BS EN 62444
SANS 1213 BS 6121 Part 1

MASC 11-303
Installation: AS/NZS 3000 BS 7430
BS 6121-5 IEC 60364-5-54
BS 7671 SANS 0142
Marine: DNV-GL TAE000000Z ABS 20-SG1952694-PDA



EMC Compatible: SGS EMC197708/1

London Underground Approval: 3043

Protection: IP66 - MASC 11-263


Temperature Range: -65°C to 120°C

Material (Gland): Brass (Nickel Plated) BS 2874 / EN 12164

Material (Seal): Thermoset Elastomer



Code	Kit Code	LS Kit Code	Low Smoke		Reference Bedding OD (A)		Cable OD (B)		Gland		Armour Dia (F)		Thread	
			Size	Max	Min	Max	Length (L2)	Min	Max	Entry (C)	Length (L1)	A/F	A/C	
051216	GPCW16	GPCW16LS	00 - 16ss	8.5	8.0	13.5	55.0	0.90	0.90	M16 x 1.5	10.0	24.0	27.0	
051200	GPCW00	GPCW00LS	00 - 20ss	8.5	8.0	13.5	55.0	0.90	0.90	M20 x 1.5	10.0	24.0	27.0	
0512-0	GPCW0	GPCW0LS	0 - 20s	12.0	11.5	16.0	55.0	0.90	1.25	M20 x 1.5	10.0	24.0	27.0	
051201	GPCW1	GPCW1LS	1 - 20	15.0	14.5	20.5	60.0	0.90	1.25	M20 x 1.5	10.0	27.0	30.0	
051202	GPCW2	GPCW2LS	2 - 25	20.0	20.5	26.5	70.0	1.25	1.60	M25 x 1.5	10.0	35.0	39.0	
051203	GPCW3	GPCW3LS	3 - 32	26.5	26.5	33.5	76.0	1.60	2.00	M32 x 1.5	10.0	42.0	47.0	
051204	GPCW4	GPCW4LS	4 - 40	34.0	33.0	42.5	90.0	1.60	2.00	M40 x 1.5	15.0	52.0	59.0	
051205	GPCW5	GPCW5LS	5 - 50	44.5	42.5	52.5	99.0	2.00	2.50	M50 x 1.5	15.0	65.0	73.0	
051206	GPCW6	GPCW6LS	6 - 63	56.5	52.5	65.5	120.0	2.00	2.50	M63 x 1.5	15.0	80.0	90.0	
051207	GPCW7	GPCW7LS	7 - 75	67.5	65.5	78.0	143.0	2.50	3.15	M75 x 1.5	15.0	96.0	108.0	
051208	GPCW8	GPCW8LS	8 - 80	74.0	78.0	82.0	143.0	2.50	3.15	M80 x 2.0	20.0	96.0	108.0	
051209	GPCW9	GPCW9LS	9 - 90	81.5	82.0	91.0	143.0	3.00	3.50	M90 x 2.0	20.0			
051210	GPCW10	GPCW10LS	10 - 100	91.0	90.0	100.0	143.0	3.00	3.50	M100 x 2.0	20.0			

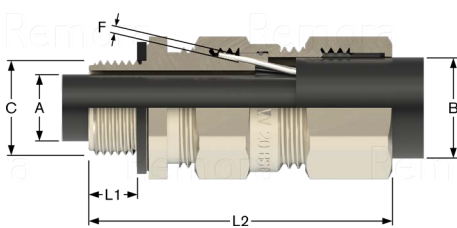

Kits and Accessories

CW Glands can also be supplied in kits complete with;
2 glands, 2 locknuts, 2 earhtags, 2 PVC shrouds (M16-M32)
1 gland, 1 locknut, 1 earhtag, 1 PVC shroud (M40-M100)

